


The new **Tex** single gas detector from GMI

GREEN FOR GO

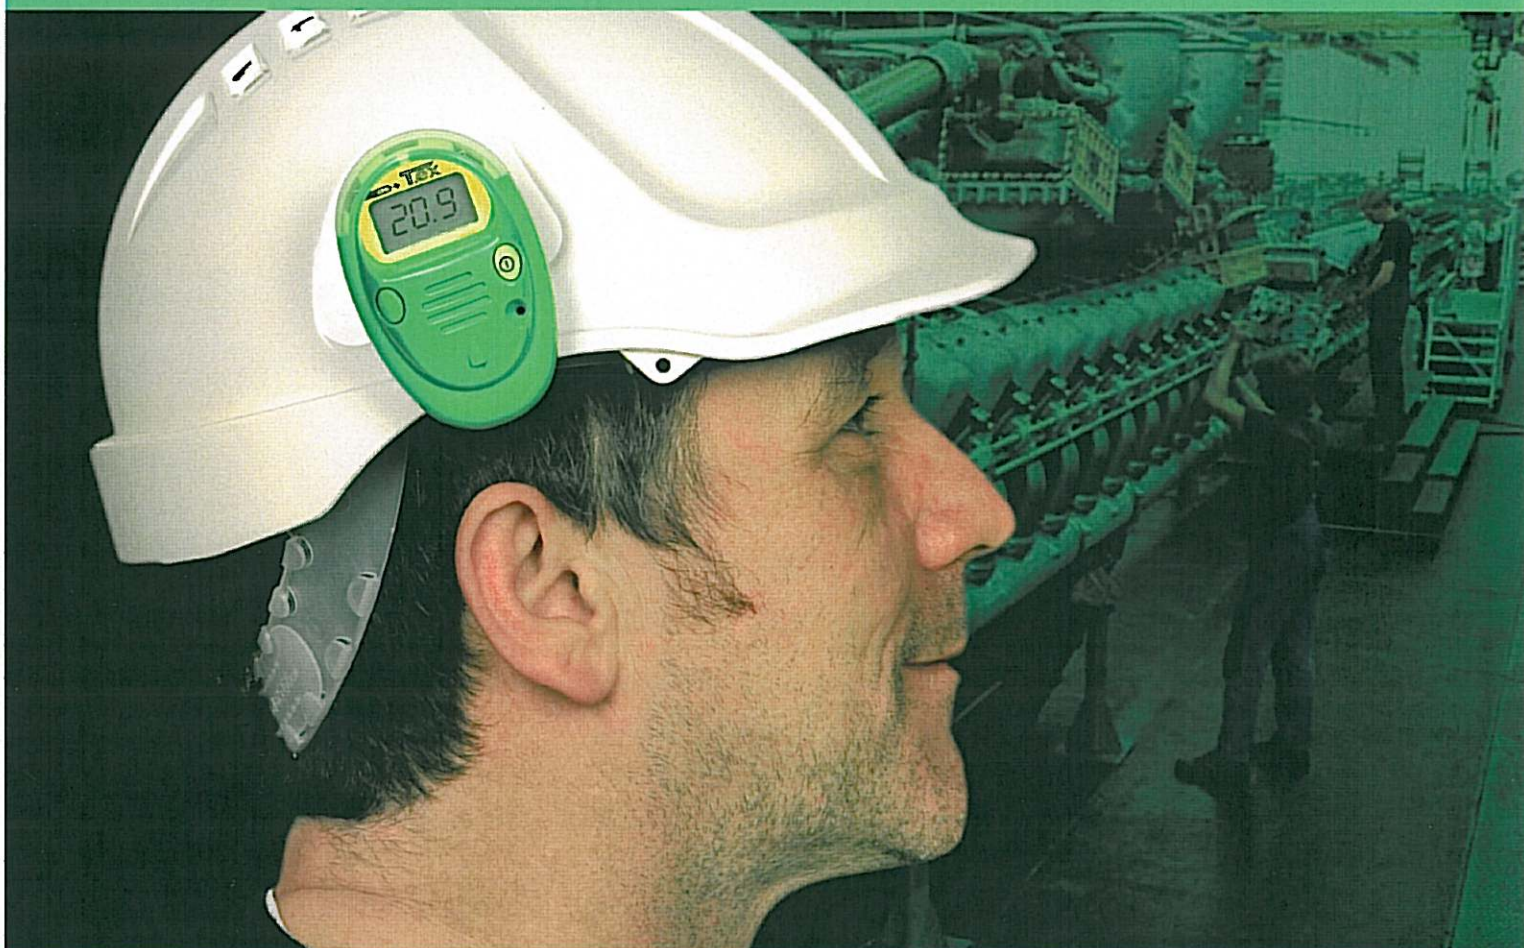

EXCELS IN HARSH ENVIRONMENTS

**visible . audible . durable . refurbishable
easy to handle . one button operation**



GAS MEASUREMENT INSTRUMENTS LTD



Tel: +44 (0) 141 812 3211 / Fax: +44 (0) 141 812 7820 / www.gmiuk.com / sales@gmiuk.com

The new **Tex** single gas detector . . .

Specifications

Physical Properties

Weight: 76g (2.7oz) Toxic / 86g (3.0oz) Oxygen
 Dimensions: 85 (H) x 55 (W) x 29 (D) mm.
 3.3 (H) x 2.2 (W) x 1.1 (D) in.

Environment

Temperature Limits: -20 to +50 Deg. C.
 (-4 to +122 Deg. F.)

Humidity: 0 to 98% RH (non-condensing)

Alarms: audible 95dB @ 10cm. (4 in.) / vibrating
 ultra bright LED's

Warranty: instrument lifetime, providing
 continuous maintenance free use.

Performance tested to:

EN 50104 (Oxygen)

EN 45544 (Toxic)

Protection Rating: IP 67


Function Test: checks display functionality,
 alarms and operation.

Certification: ATEX Ex II 1 G Ex ia IIC T4

UL 913 Class I, Div 1 Groups ABCD



actual size

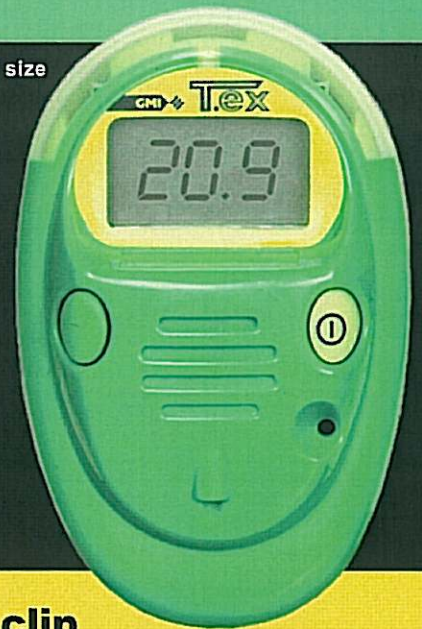

. . with a robust crocodile clip

Bump Test Station / Calibration Station

Ensure you are ready to go

The GMI bump-test station provides a quick verification that your Tex instrument is operating correctly. Designed for companies that use a large volume of instruments, the bump-test station is economical on gas use and time. Simply insert the instrument and an automatic full function test will be completed in a matter of seconds.

Green for Go given after essential checks completed:

- Sensor response to gas
- Visual LED alarm activation
- Audible alarm activation

Full calibration option is available. This station provides a complete calibration, with storage, of each instrument calibration and certificate printing.



Ordering Requirement

Supplied complete with user handbook, integrated crocodile clip, calibration certificate and declaration of conformity

Sensors	Range	Resolution	Warranty	tick box for quote
Tex - O2	0 to 25%	0.1%	2 years	
Tex - H2S	0 to 100ppm	1ppm	3 years	
Tex - CO	0 to 500ppm	1ppm	3 years	
Tex - SO2	0 to 30ppm	0.1ppm	2 years	
Tex - CL2	0 to 10ppm	0.1ppm	2 years	

Standard accessories	Part Number	tick box for quote
Hard hat clip adaptor	63101	
Hand aspirator c/w 3m. sample line	63103	
In-line hydrophobic filter assembly	66485	
Ball float assembly	66545	
Sample line per metre	66118	

Communications options	Part Number	tick box for quote
Bump-test Station (stand alone)	63121	
Automatic Calibration Station	63122	

Your details	GMI details
Company:	Inchinnan Business Park Renfrew PA4 9RG Scotland, UK
Your name:	www.gmiuk.com
Tel:	Tel: + 44 (0) 141 812 3211
Fax:	Fax: + 44 (0) 141 812 7820
e-mail:	e-mail: sales@gmiuk.com

